

THROUGH FEED POSTFORMER

TURANLAR UK

DESCRIPTION

This is the most simplistic throughfeed postformer that Turanlar supply. Unlike the T-PF-280 and T-PF-590, it does not come with a triple cartridge carousel or infrared heaters. This machine is affordable for small manufacturers who have a need for postformed panels/worktops but will not vary from their specification. It is a basic entry level throughfeed postformer and should only be considered if you have a small output of postformed products.



PRODUCT INFORMATION

Units that come standard with the T-PF-190 are:


- Automatic Conveyer Unit
- Top & Bottom Heating Elements with Temperature Control.
- Single Profile Cartridge Unit
- Bottom Trimming Unit
- Speed Adjustment Unit



PRODUCT SPECIFICATION

Electrical Level:	400 V – 50 Hz.
Nominal Current:	14, 5 A
Laminate Thickness:	0.4-1 mm
Laminate Height:	70 mm
Speed:	0 – 7.5 m / min
Total Electrical Power:	5, 5 kW
Working Height:	870 mm
Trimmer Motor:	0, 37 kW - 12000 rpm
Machine Width:	920 mm
Machine Length:	3300 mm
Machine Height:	1600 mm
Machine Weight:	815 kg

PROFILES

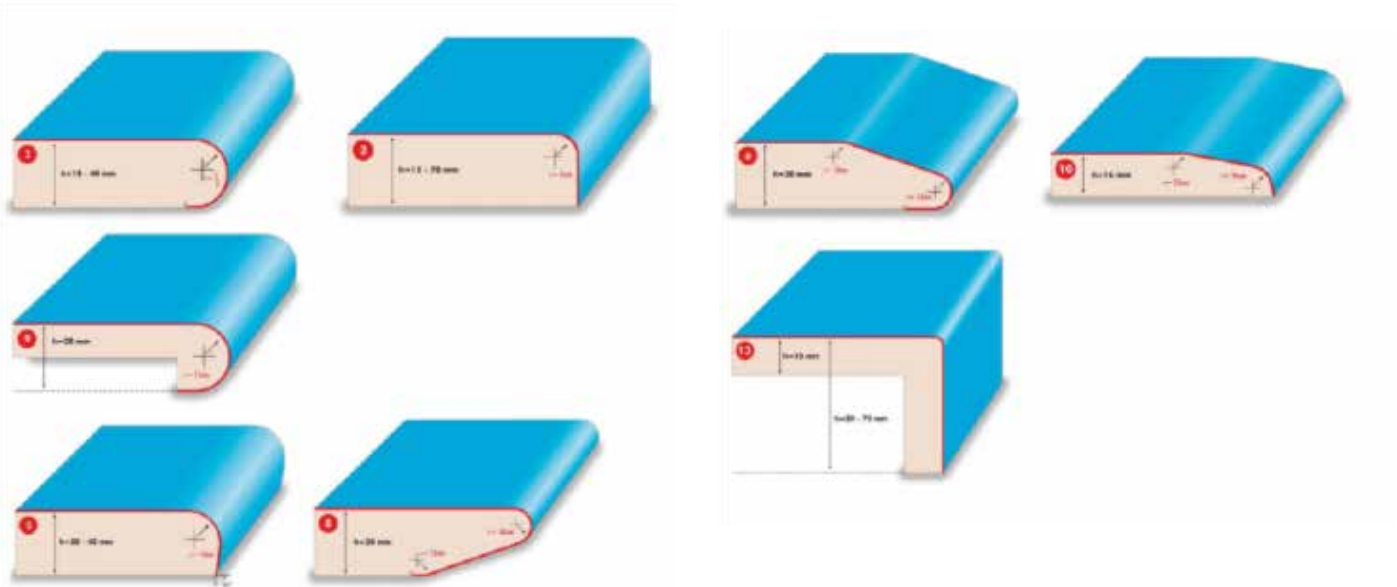



TECHNICAL DIMENSIONS

